

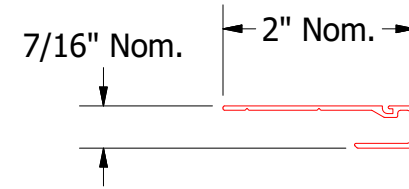


Structural Substrate Trims and Sealant


- Clip and Seal

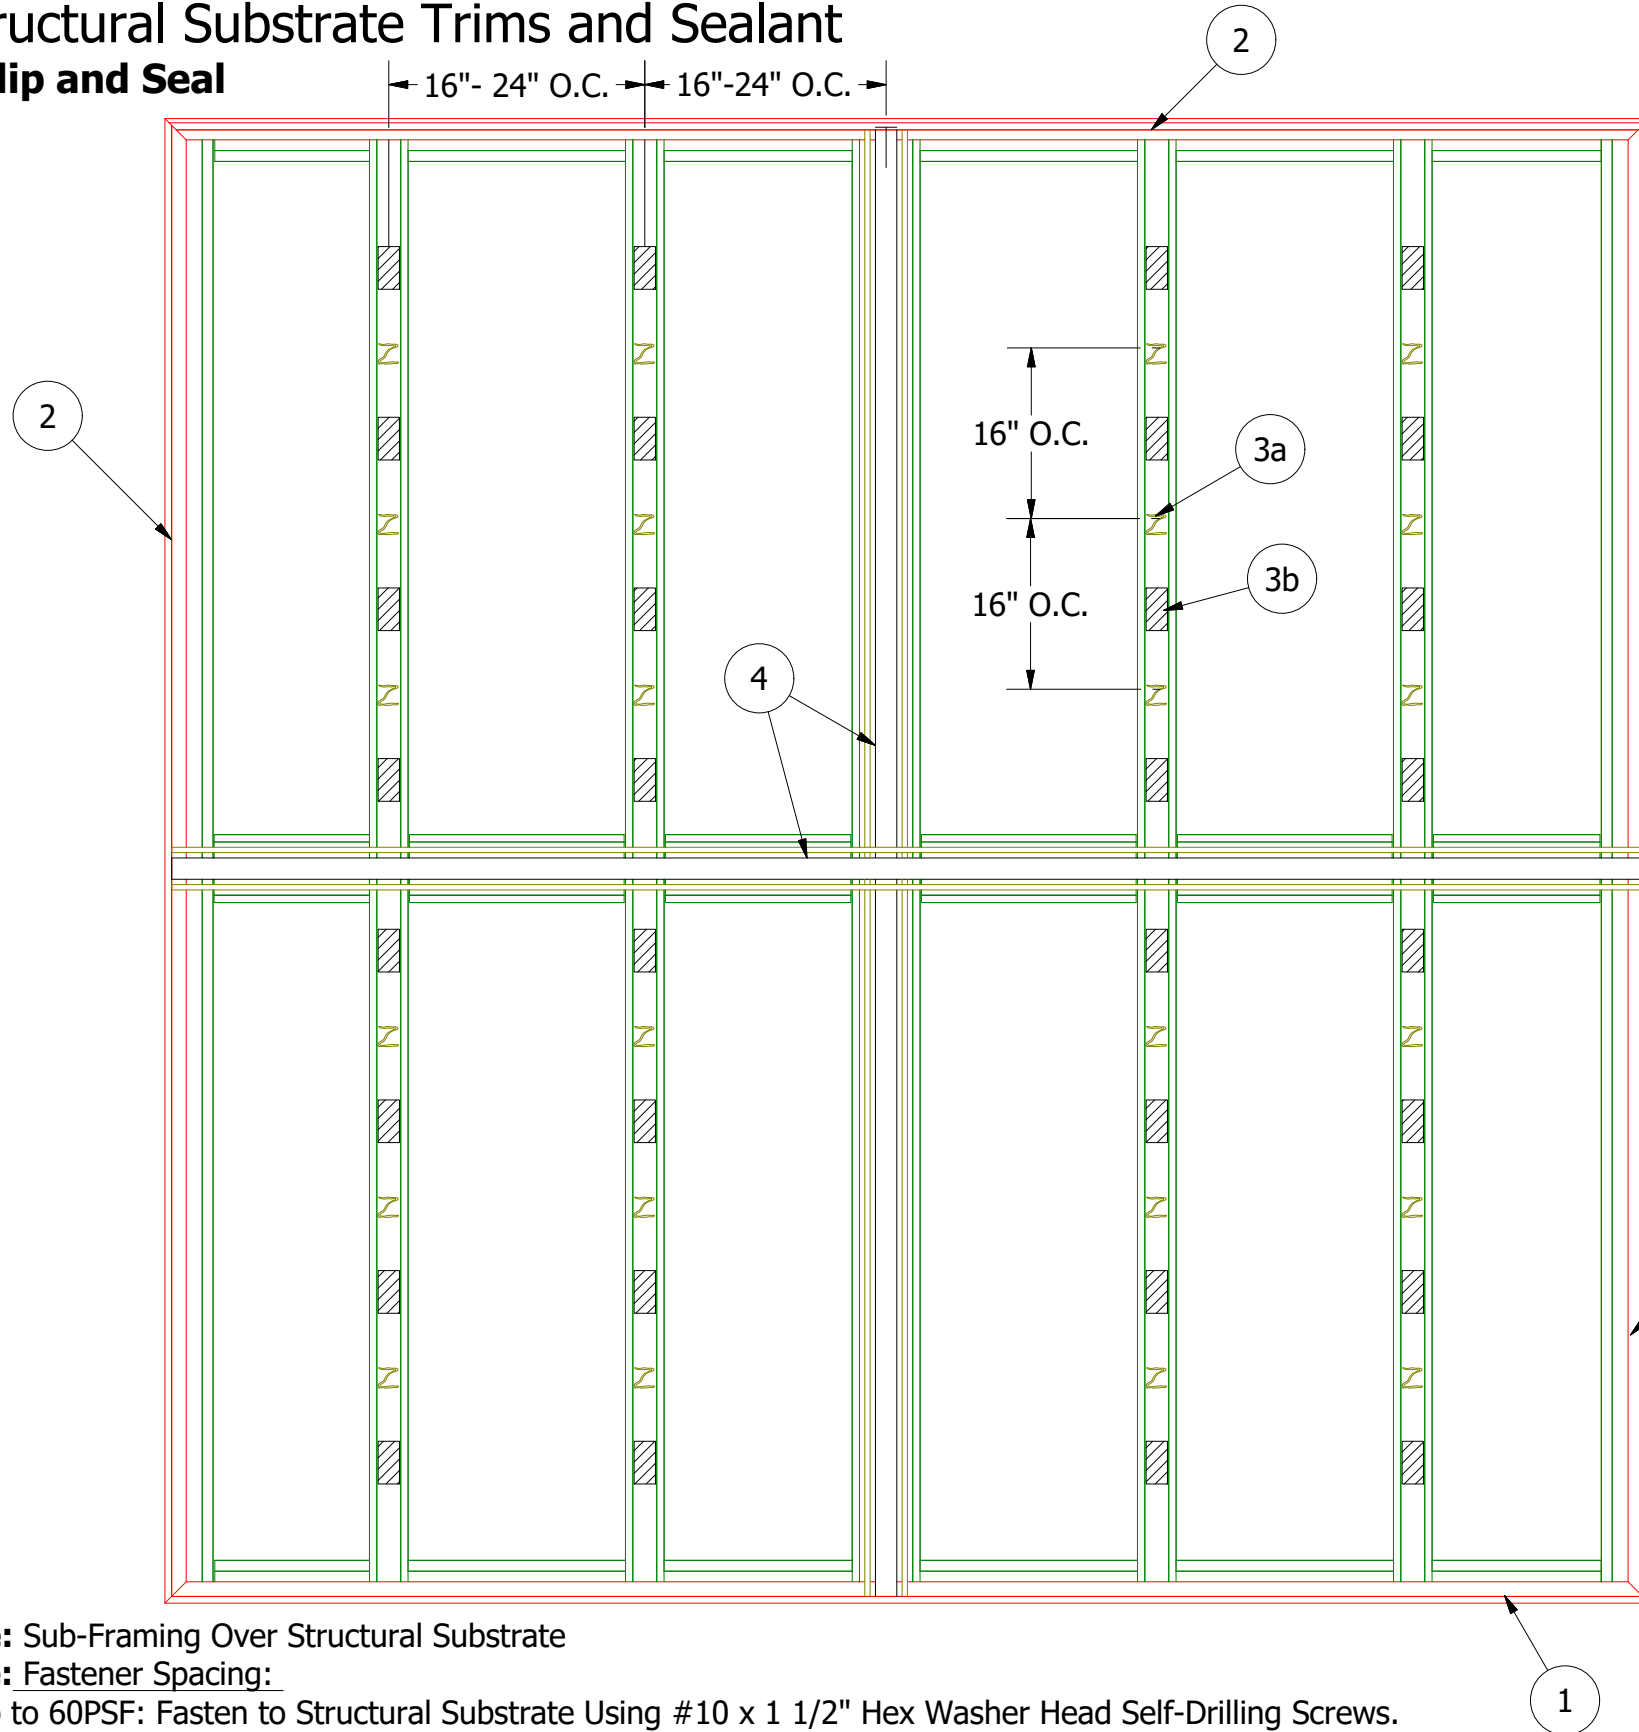


J Molding Extrusion
(1) J Molding Extrusion Installed on EJ Sub-Framing Member.

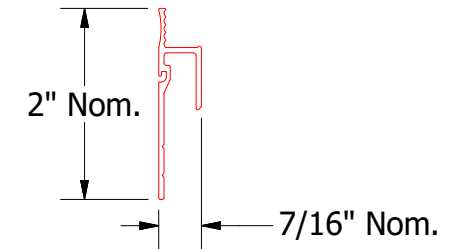

Termination J Molding Extrusion
(2) Termination J Molding Extrusion Installed on EJ Sub-Framing Member.



Panel Adhesive (1/4" - 3/8" Thickness)
(3a) Panel Adhesive Applied 16" O.C. Vertically

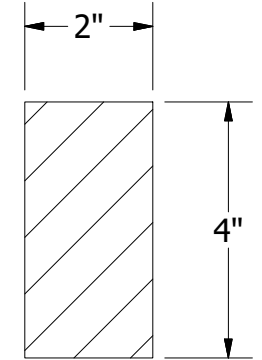

Foam Tape
(3b) 4" Foam Tape Strips Installed Vertically on AH Sub-Framing Member.
(4) Foam Tape at Center and Adhesive Installed on Both Sides of Tape on SH Sub-Framing Member For Transitions.

Note: Sub-Framing Over Structural Substrate

Note: Fastener Spacing:

A) Up to 60PSF: Fasten to Structural Substrate Using #10 x 1 1/2" Hex Washer Head Self-Drilling Screws.

- EJ Members
 - Vertical: (1) Fasten 16" O.C. (Max)
 - Horizontal: (1) Screw Located 2" From Each End (2 Total)
- SH/RH Members
 - Vertical: (2) Fasten 16" O.C. (Max); One Screw per Flange
 - Horizontal: (2) Screws Located 2" From Each End (4 Total)
- AH Members
 - Vertical: (2) Fasten 16" O.C. (Max); One Screw per Flange

ATAS ATAS INTERNATIONAL, INC
 Allentown PA
 610-395-8445
 Mesa AZ
 480-558-7210

TITLE				SterraCore Solid Substrate Sub-Framing Detail			
REV. NO.		DATE		DESCRIPTION OF REVISION		BY APP	
DWG. NO.		DR		DMR		DATE	
MATERIAL		SH. SIZE		SCALE		X:X	