




Stiffening Ribs



Without Ribs



Striations

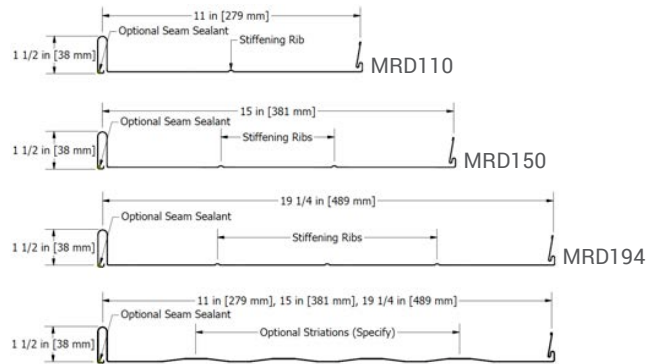

DUTCH SEAM®

SKU: MRD110, MRD150, MRD194

MATERIAL

.032, .040 aluminum
24, 22* ga. metallic coated steel
24 ga. 55% Al-Zn alloy coated steel with acrylic coating
16, 20 oz. copper*
.8 mm zinc* (MRD110 only)

PANEL SPECS

Coverage: 11", 15", 19¼"
(stiffening ribs standard, specify without ribs or with striations)
Minimum Length: 2'-0"
Seam Height: 1½"

AVAILABLE

Tapered

TEXTURE

Smooth or Stucco Embossed

MINIMUM SLOPE

2:12

www.atas.com/dutchseam

COLONIAL SEAM®

SKU: HCS120, HCS160, HCH110, HCH150

MATERIAL

.032 aluminum
24 ga. metallic coated steel

PANEL SPECS

Coverage: 11⅜", 12⅜", 15⅜", 16⅜" (plank ribs or striations optional)
Minimum Length: 2'-0"
Maximum Length: 20'-0" for aluminum, 25'-0" for steel
Seam Height: 1", 1½"

AVAILABLE

Factory panel pre-notching available.
Contact ATAS for specifics.

TEXTURE

Smooth or Stucco Embossed

MINIMUM SLOPE

3:12

www.atas.com/colonialseam

