

ISOLEREN® FIRE-RATED

SKU: IMF, ISF

EXTERIOR

Profile: Isoleren MF, SF

Gauge: 26, 24

Finish: 1.0 mil thick 70% PVDF, Polyester, Siliconized Polyester

Texture: Embossed

INTERIOR

Profile: Isoleren ML

Gauge: 26, 24

Finish: Siliconized Polyester, Standard Gloss (USDA White)

Texture: Embossed

SUBSTRATE

Galvalume®, G90 Galvanized (Grade 33), and Stainless Steel (Type 304)

THICKNESS (A)

4", 5", 6", 8", 10", and 12"

CORE

ROCKWOOL® ConRock L structural mineral wool

K FACTOR



0.277 BTU-in/hr-ft²/F° @ 40° F mean temperature (R-3.61)

SPLINES

Fiber-reinforced cement board (½" x 2¾" x 8' long)

AVAILABLE LENGTHS

Minimum 8'-0" to maximum 30'-0"; over 30'-0", please inquire

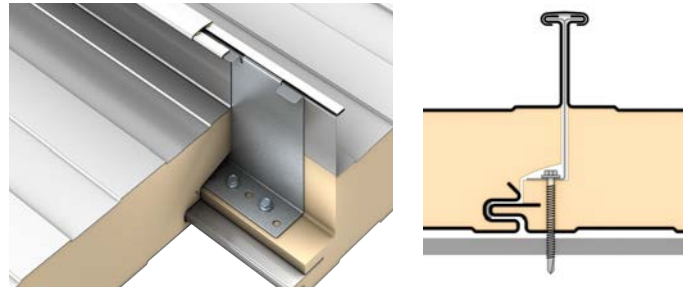

ISOLEREN® RL

SKU: IRL

RIB TYPE

2⅜" tall, tee-shaped rib with separate batten

ATTACHMENT

Mechanically seamed rib with clip

THICKNESS (A)

2½", 3", 4", 5", and 6"

EXTERIOR TEXTURE

Smooth

STANDARD LENGTHS

12'-0" to 53'-0"

MINIMUM SLOPE

½:12